

### 特点:

- 铝合金模具成型
- 支持 Intel® 6/7/8/9th Generation Core/Pentium/Celeron Desktop CPU
- 安装标准 ITX 主板, 支持标准 1U 电源
- 选配转接卡, 可支持 2\*PCI 或 1\*PCIe X16 扩展
- 默认 1 个 2.5 英寸 7mm 抗震抗冲击硬盘位设计
- 前面板开关机设计, 电源及存储状态显示, 更易于系统维护
- 支持多方向壁挂式、桌面式安装



远程管理



状态监控



远程运维




安全控制

### 产品规格

Model	IPC330D-H110L5	
Processor System	CPU	Support Intel® 6/7/8/9th Generation Core / Pentium/ Celeron Desktop CPU
	TDP	65W
	Socket	LGA1151
	Chipset	H110
	BIOS	AMI UEFI BIOS (Support Watchdog Timer)
Memory	Socket	2 * DDR4-2133/2400MHz, non-ECC U-DIMM Slot
	Capacity	Single Max. 16GB
Graphics	Controller	Intel® HD Graphics
Ethernet	Controller	1 * I219 GBE LAN Chip (10/100/1000 Mbps, RJ45)
		4 * I210 GBE LAN Chip (10/100/1000 Mbps, RJ45) + 4 * POE Connector
		1 * POE Power Connector
Storage	SATA	2 * SATA3.0 7P Connector
	mSATA	1 * mSATA ( Share slot with Mini PCIe, default)
Expansion Slots	PCIe	①: 1 * PCIe x16 ②: 2 * PCI PS: ①、② One out of two, Expansion card length ≤ 235mm
	Mini PCIe	1 * Mini PCI-E Slot (mSATA/WIFI+4G/3G, default mSATA+4G/3G ), with 1 * Full-Size SIM Card Slot
Front I/O	Ethernet	5 * RJ45
	USB	4 * USB3.0 2 * USB2.0
	Display	1 * VGA(DB15/F): max resolution up to 1920*1200@60Hz 1 * HDMI 1.4b(TYPE-A): max resolution up to 4096*2160@24Hz
	Serial	2 * RS232/422/485 (COM1/2, DB9/M,Jump control)
	Button	1 * Power Button
	PWR_SW1	Remote Power Switch 2P 3.81mm Terminal Block
	LED	1 * Power status LED 1 * Hard drive status LED
Internal I/O	USB	2 * USB2.0 (Header)
	COM	2 * RS232 (COM3/4, Header)
	GPIO	1 * 8 bits DIO (4xDI and 4xDO, wafer)
	SATA	2 * SATA3.0 7P Connector
	FAN	1 * CPU FAN (Header) 1 * SYS FAN (Header)
	Front Panel	1 * Front Panel (Header)
Power Supply	Type	1U FLEX
	Power Input Voltage	AC power supply, voltage and frequency shall be based on the 1U FLEX power supply provided
	RTC Battery	CR2032 Coin Cell
OS Support	Windows	Windows7/8.1/10 (8th generation and above CPUs only support WIN10)
	Linux	Linux
Watchdog	Output	System Reset
	Interval	Programmable 1 ~ 255 sec
Mechanical	Enclosure Material	SGCC+Al6061
	Dimensions	266mm * 127mm * 268mm
	Mounting	Wall mounted, Desktop
Environment	Heat Dissipation System	PWM fan cooling
	Operating Temperature	0 ~ 50°C
	Storage Temperature	-20 ~ 75°C
	Relative Humidity	10 to 95% RH (non-condensing)

### 产品尺寸

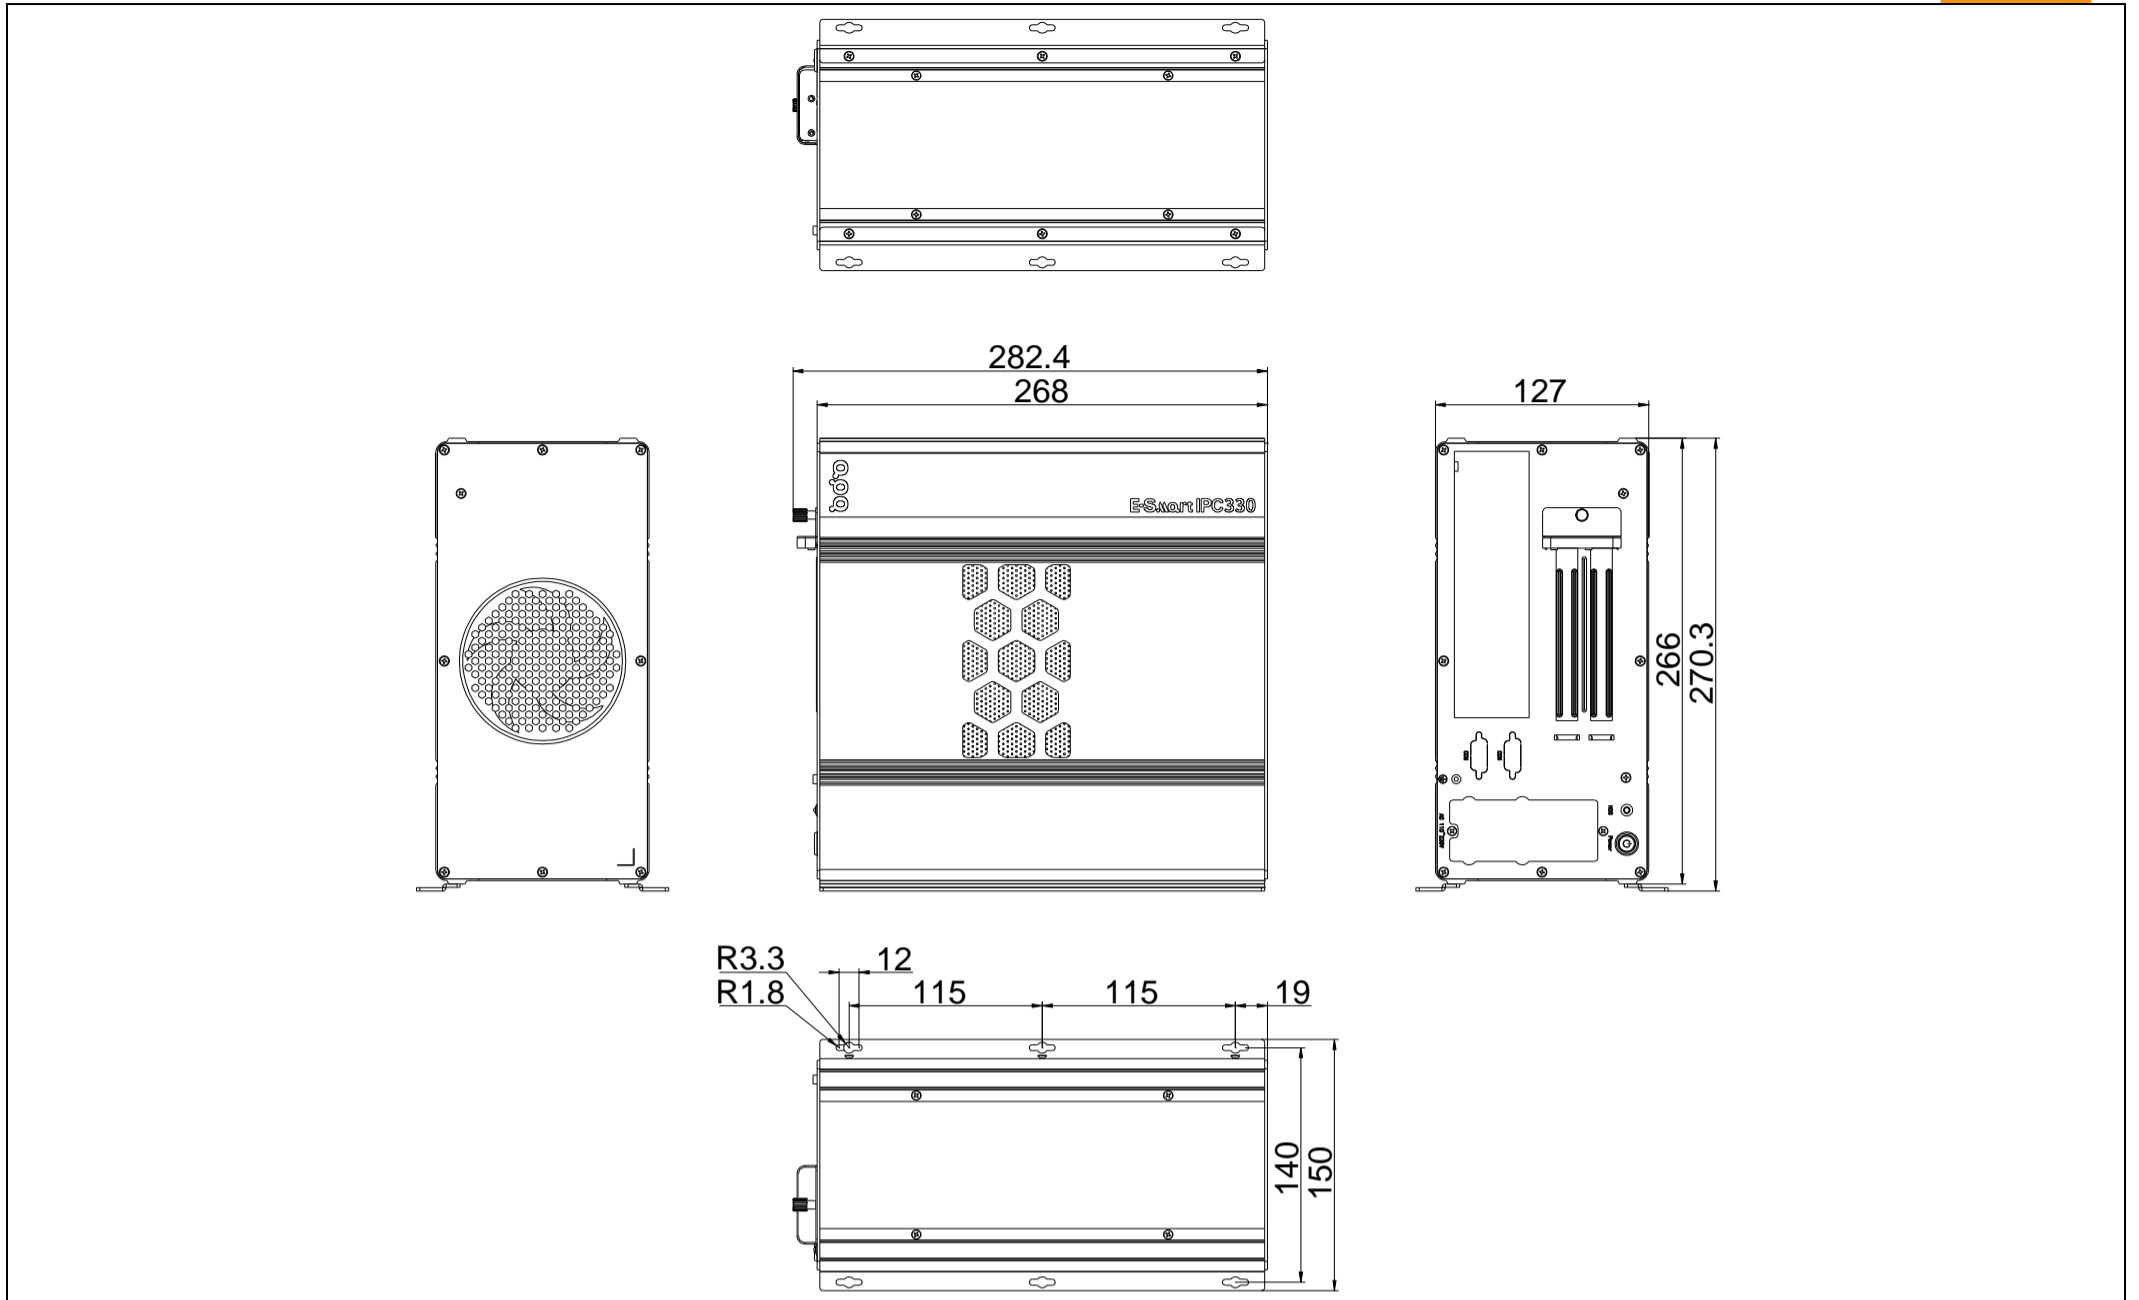

机箱接口

